

### Permanently installed ultrasonic flowmeter for liquids

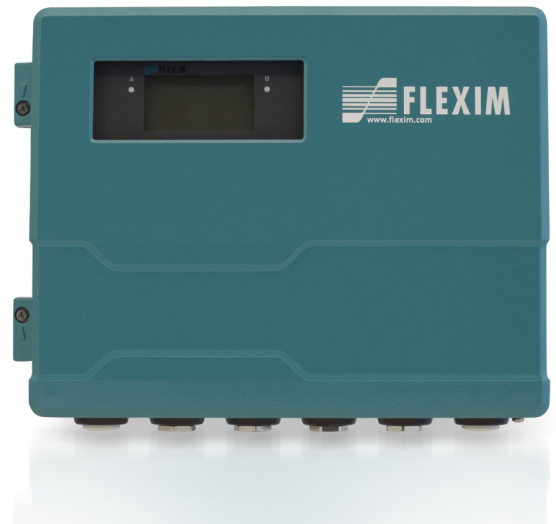
Transmitter for permanent outdoor wall or pipe mounting

#### Features

- Exact and highly reliable bidirectional clamp-on volume and mass flow measurement
- Installation and start-up do not require any pipe work nor any process interruptions
- High measurement accuracy even at very low as well as very high flow rates and independent of the flow direction (bidirectional)
- Possibility to measure thermal energy quantities when using clamp-on or inline temperature probes
- Automatic loading of calibration data and transducer recognition
- Bidirectional communication and support of common bus technologies (Profibus PA, Foundation Fieldbus, HART, Modbus, BACnet, M-Bus)
- Advanced self-diagnosis and possibilities for event-based triggering of data recording for the supervision and control of critical processes
- Transmitter and transducers for use in hazardous areas are available
- Transmitter and transducers are separately calibrated (traceable to national standards)
- Transducers available for a wide range of inner pipe diameters and fluid temperatures  $-200...+600\text{ }^{\circ}\text{C}$
- The measurement is zero point stable, drift free and independent of pipe material, process pressure, process temperature and process fluid

#### Applications

- Chemical industry
- Petrochemical industry
- Oil and gas industry
- Pharmaceutical industry
- Semiconductor industry
- Manufacturing industries
- Building technology/energy management
- Water and wastewater industry
- Mining industries



FLUXUS F721\*\*-\*A



FLUXUS F721\*\*-\*S



Variofix C

**Function** ..... 3  
 Measurement principle ..... 3  
 Calculation of volumetric flow rate ..... 3  
 Number of sound paths ..... 4

**Transmitter** ..... 5  
 Technical data ..... 5  
 Dimensions ..... 8  
 2" pipe mounting kit ..... 9  
 Terminal assignment ..... 10

**Transducers** ..... 11  
 Transducer selection ..... 11  
 Transducer order code ..... 12  
 Technical data ..... 13

**Transducer mounting fixture** ..... 20

**Coupling materials for transducers** ..... 22

**Connection systems** ..... 23

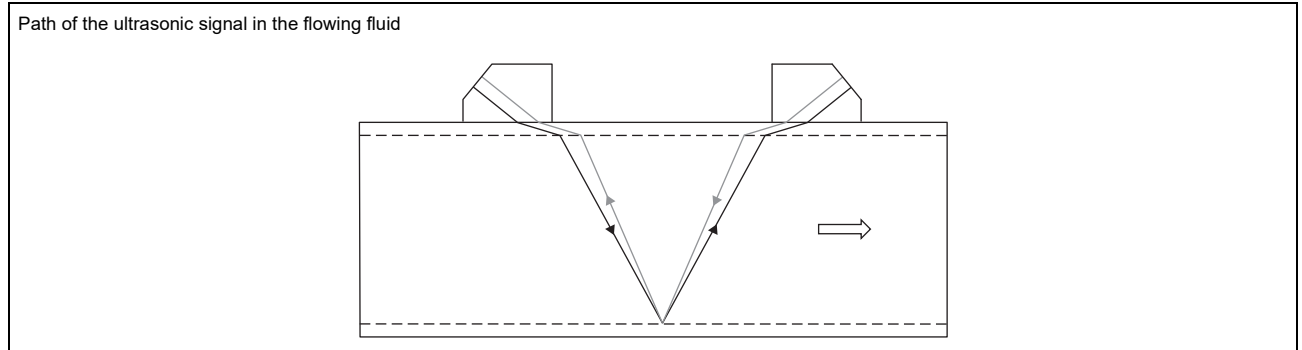
**Junction box** ..... 25  
 Technical data ..... 25  
 Dimensions ..... 26  
 2" pipe mounting kit ..... 26

**Clamp-on temperature probe (optional)** ..... 27  
 Technical data ..... 27  
 Fixation ..... 29  
 Junction box ..... 29

## Function

### Measurement principle

The transducers are mounted on the pipe which is completely filled with the fluid. The ultrasonic signals are emitted alternately by a transducer and received by the other. The physical quantities are determined from the transit times of the ultrasonic signals.

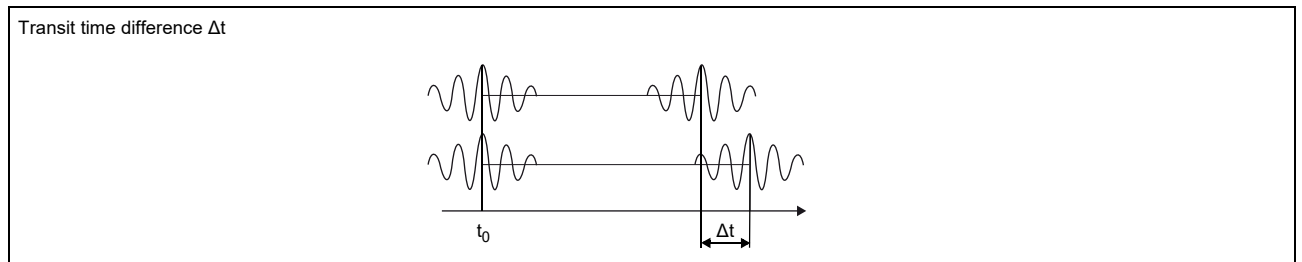


### Transit time difference principle

As the fluid where the ultrasound propagates is flowing, the transit time of the ultrasonic signal in flow direction is shorter than the one against the flow direction.

The transit time difference  $\Delta t$  is measured and allows the flowmeter to determine the average flow velocity along the propagation path of the ultrasonic signals. A flow profile correction is then performed in order to obtain the area averaged flow velocity, which is proportional to the volumetric flow rate.

The integrated microprocessors control the entire measuring cycle. The received ultrasonic signals are checked for measurement usability and evaluated for their reliability. Noise signals are eliminated.



### HybridTrek

If the gaseous or solid content in the fluid increases occasionally during measurement, a measurement with the transit time difference principle is no longer possible. NoiseTrek mode will then be selected by the flowmeter. This measurement method allows the flowmeter to achieve a stable measurement even with high gaseous or solid content.

The transmitter can switch automatically between transit time and NoiseTrek mode without any changes to the measuring setup.

### Calculation of volumetric flow rate

$$\dot{V} = k_{Re} \cdot A \cdot k_a \cdot \frac{\Delta t}{2 \cdot t_y}$$

where

- $\dot{V}$  - volumetric flow rate
- $k_{Re}$  - fluid mechanics calibration factor
- $A$  - cross-sectional pipe area
- $k_a$  - acoustical calibration factor
- $\Delta t$  - transit time difference
- $t_y$  - average of transit times in the fluid

### Number of sound paths

The number of sound paths is the number of transits of the ultrasonic signal through the fluid in the pipe. Depending on the number of sound paths, the following methods of installation exist:

- **reflection arrangement**

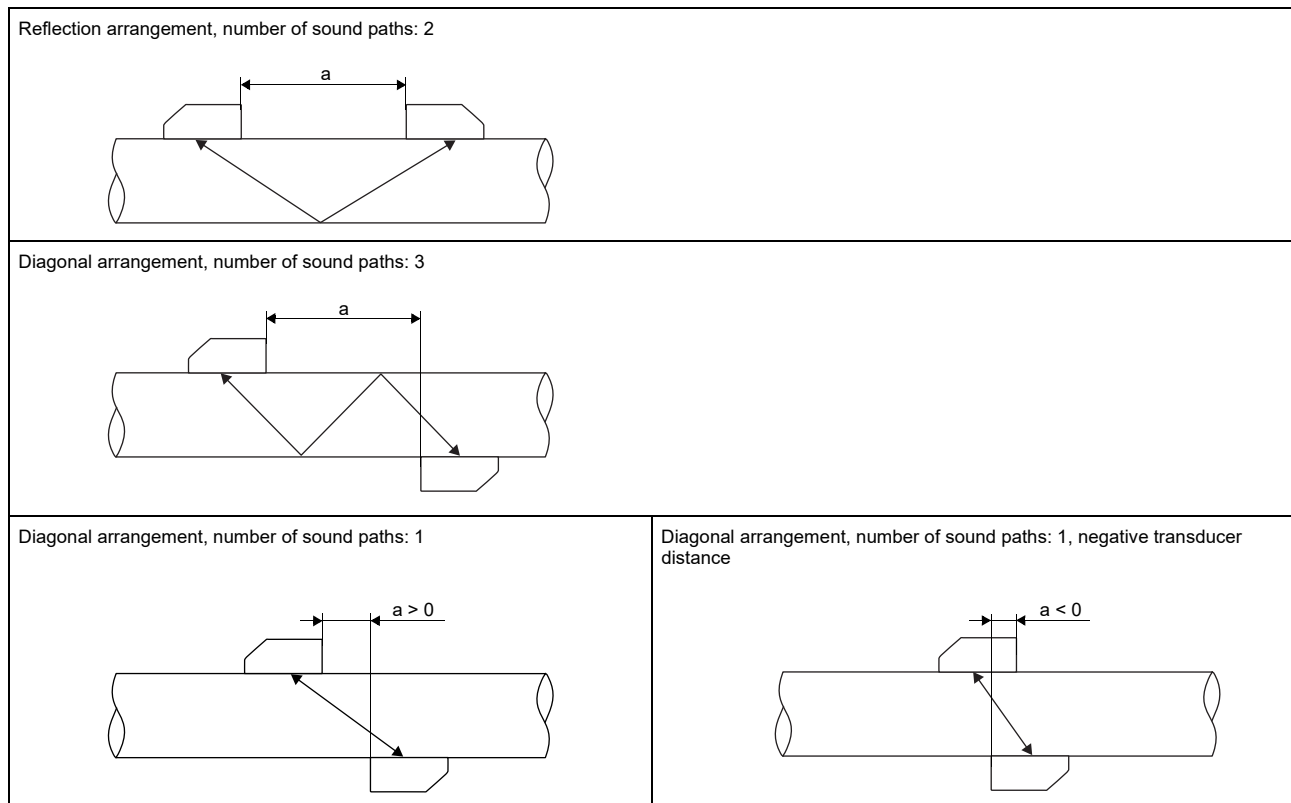
The number of sound paths is even. The transducers are mounted on the same side of the pipe. Correct positioning of the transducers is easy.

- **diagonal arrangement**

The number of sound paths is odd. The transducers are mounted on opposite sides of the pipe. In the case of a high signal attenuation by the fluid, pipe and coatings, diagonal arrangement with 1 sound path will be used.

The preferred method of installation depends on the application. While increasing the number of sound paths increases the accuracy of the measurement, signal attenuation increases as well. The optimum number of sound paths for the parameters of the application will be determined automatically by the transmitter.






As the transducers can be mounted with the transducer mounting fixture in reflection arrangement or diagonal arrangement, the number of sound paths can be adjusted optimally for the application.



a - transducer distance

# Transmitter

## Technical data

	FLUXUS F721**-NN0*A	FLUXUS F721**-NN0*S	FLUXUS F721**-A20*S	FLUXUS F721**-F20*S
				
design	standard field device nonEx	field device with stainless steel housing nonEx	field device with stainless steel housing zone 2	field device with stainless steel housing FM Class I Div. 2
<b>measurement</b>				
measurement principle	transit time difference correlation principle, automatic NoiseTrek selection for measurements with high gaseous or solid content			
flow velocity	m/s	0.01...25		
repeatability	0.15 % MV ±0.005 m/s			
fluid	all acoustically conductive liquids with < 10 % gaseous or solid content in volume (transit time difference principle)			
temperature compensation	corresponding to the recommendations in ANSI/ASME MFC-5.1-2011			
<b>measurement uncertainty (volumetric flow rate)</b>				
measurement uncertainty of the measuring system <sup>1</sup>	±0.3 % MV ±0.005 m/s			
measurement uncertainty at the measuring point <sup>2</sup>	±1 % MV ±0.005 m/s			
<b>transmitter</b>				
power supply	<ul style="list-style-type: none"> <li>• 100...230 V/50...60 Hz or</li> <li>• 20...32 V DC or</li> <li>• 11...16 V DC</li> </ul>			
power consumption	W	< 15		
number of measuring channels		1, optional: 2		
damping	s	0...100 (adjustable)		
measuring cycle	Hz	100...1000 (1 channel)		
response time	s	1 (1 channel), option: 0.02		
housing material		aluminum, powder coated	stainless steel 316L (1.4404)	
degree of protection		IP66	IP66	IP66   IP65
dimensions	mm	see dimensional drawing		
weight	kg	5.4	5.1	
fixation		wall mounting, optional: 2" pipe mounting		
ambient temperature	°C	-40...+60 (< -20 °C without operation of the display)	-40...+60 (< -20 °C without operation of the display)	-40...+60 (< -20 °C without operation of the display)   -20...+55/60
display		128 x 64 dots, backlight		
menu language		English, German, French, Spanish, Dutch, Russian, Polish, Turkish, Italian		
<b>explosion protection</b>				
<b>• ATEX/IECEx</b>				
marking	-	-	CE 0637  II3G I2D Ex nA nC ic IIC T4 Gc Ex tb IIIC T120 °C Db T <sub>a</sub> -40...+60 °C	-
certification ATEX	-	-	IBExU11ATEX1015	-
certification IECEx	-	-	IECEx IBE 11.0008	-
<b>• FM</b>				
marking	-	-	-	F721**-F20*S2, F721**-F20*S3:  NI/Cl. I,II,III/Div. 2/ GP. A,B,C,D,E,F,G/ T5  F721**-F20*S1:  NI/Cl. I,II,III/Div. 2/ GP. A,B,C,D,E,F,G/ T4A

<sup>1</sup> with aperture calibration of the transducers

<sup>2</sup> for transit time difference principle and reference conditions

<sup>3</sup> outside the explosive atmosphere (housing cover open)

<sup>4</sup> with inputs and including parametrisation of the transmitter

	FLUXUS F721**-NN0*A	FLUXUS F721**-NN0*S	FLUXUS F721**-A20*S	FLUXUS F721**-F20*S
<b>measuring functions</b>				
physical quantities	volumetric flow rate, mass flow rate, flow velocity, thermal energy rate (if temperature inputs are installed)			
totaliser	volume, mass, optional: thermal energy			
calculation functions	average, difference, sum (2 measuring channels necessary)			
diagnostic functions	sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times			
<b>communication interfaces</b>				
service interfaces	measured value transmission, parametrisation of the transmitter: • USB <sup>3</sup> • LAN <sup>3</sup>			
process interfaces	max. 1 option: • RS485 (ASCII sender) • Modbus RTU <sup>4</sup> • BACnet MS/TP • M-Bus • HART <sup>4</sup> • Profibus PA <sup>4</sup> • FF H1 <sup>4</sup> • Modbus TCP <sup>4</sup> • BACnet IP	max. 1 option: • RS485 (ASCII sender) • Modbus RTU <sup>4</sup> • BACnet MS/TP • M-Bus • HART <sup>4</sup> • Profibus PA <sup>4</sup> • FF H1 <sup>4</sup> • Modbus TCP <sup>4</sup> • BACnet IP	max. 1 option: • RS485 (ASCII sender) • Modbus RTU <sup>4</sup> • BACnet MS/TP • HART <sup>4</sup> • Profibus PA <sup>4</sup> • FF H1 <sup>4</sup> • Modbus TCP <sup>4</sup> • BACnet IP	
<b>accessories</b>				
data transmission kit	USB cable			
software	• FluxDiagReader: reading of measured values and parameters, graphical presentation • FluxDiag (optional): reading of measurement data, graphical presentation, report generation, parametrisation of the transmitter			
<b>data logger</b>				
loggable values	all physical quantities, totalised physical quantities and diagnostic values			
capacity	max. 800 000 measured values			
<b>outputs</b>				
	The outputs are galvanically isolated from the transmitter.			
number	on request			
<b>• switchable current output</b>				
	All switchable current outputs are jointly switched to active or passive.			
range	mA	4...20 (3.2...22)		
accuracy		0.04 % MV ±3 µA		
active output		$R_{ext} < 350 \Omega$		
passive output		$U_{ext} = 8...30 \text{ V}$ , depending on $R_{ext}$ ( $R_{ext} < 1 \text{ k}\Omega$ at 30 V)		
<b>• HART</b>				
range	mA	4...20		
accuracy		0.1 % MV ±15 µA		
active output		$U_{int} = 24 \text{ V}$ , $R_{ext} < 500 \Omega$		
passive output		$U_{ext} = 10...24 \text{ V DC}$ , depending on $R_{ext}$ ( $R_{ext} < 1 \text{ k}\Omega$ at 24 V)		
<b>• voltage output</b>				
range	V	0...1 or 0...10		
accuracy		0...1 V: 0.1 % MV ±1 mV 0...10 V: 0.1 % MV ±10 mV		
internal resistance		$R_{int} = 500 \Omega$		
<b>• frequency output</b>				
range	kHz	0...5		
optorelay		24 V/4 mA, $R_{int} = 66.5 \Omega$		
<b>• binary output</b>				
optorelay		26 V/100 mA		
Reed relay		48 V/100 mA, $R_{int} = 22 \Omega$		
binary output as alarm output				
• functions		limit, change of flow direction or error		
binary output as pulse output				
• functions		mainly for totalising		
• pulse value	units	0.01...1000		
• pulse width	ms	optorelay: 1...1000 Reed relay: 80...1000		

<sup>1</sup> with aperture calibration of the transducers

<sup>2</sup> for transit time difference principle and reference conditions

<sup>3</sup> outside the explosive atmosphere (housing cover open)

<sup>4</sup> with inputs and including parametrisation of the transmitter

	FLUXUS F721**-NN0*A	FLUXUS F721**-NN0*S	FLUXUS F721**-A20*S	FLUXUS F721**-F20*S
<b>inputs</b>				
	The inputs are galvanically isolated from the transmitter.			
number	max. 4, on request			
<b>• temperature input</b>				
type	Pt100/Pt1000			
connection	4-wire			
range	°C -150...+560			
resolution	K 0.01			
accuracy	±0.01 % MV ±0.03 K			
<b>• current input</b>				
accuracy	0.1 % MV ±10 µA			
active input	U <sub>int</sub> = 24 V, R <sub>int</sub> = 50 Ω, P <sub>int</sub> < 0.5 W, not short-circuit proof			
• range	mA 0...20			
passive input	R <sub>int</sub> = 50 Ω, P <sub>int</sub> < 0.3 W			
• range	mA -20...+20			
<b>• voltage input</b>				
range	V	0...1		
accuracy	0.1 % MV ±1 mV			
internal resistance	R <sub>int</sub> = 1 MΩ			
<b>• binary input</b>				
switching signal	5...30 V, 1 mA			5...26 V, 1 mA
functions	<ul style="list-style-type: none"> <li>• reset of the measured values</li> <li>• reset of the totalisers</li> <li>• stop of the totalisers</li> <li>• activation of the measuring mode for highly dynamic flows</li> </ul>			

<sup>1</sup> with aperture calibration of the transducers

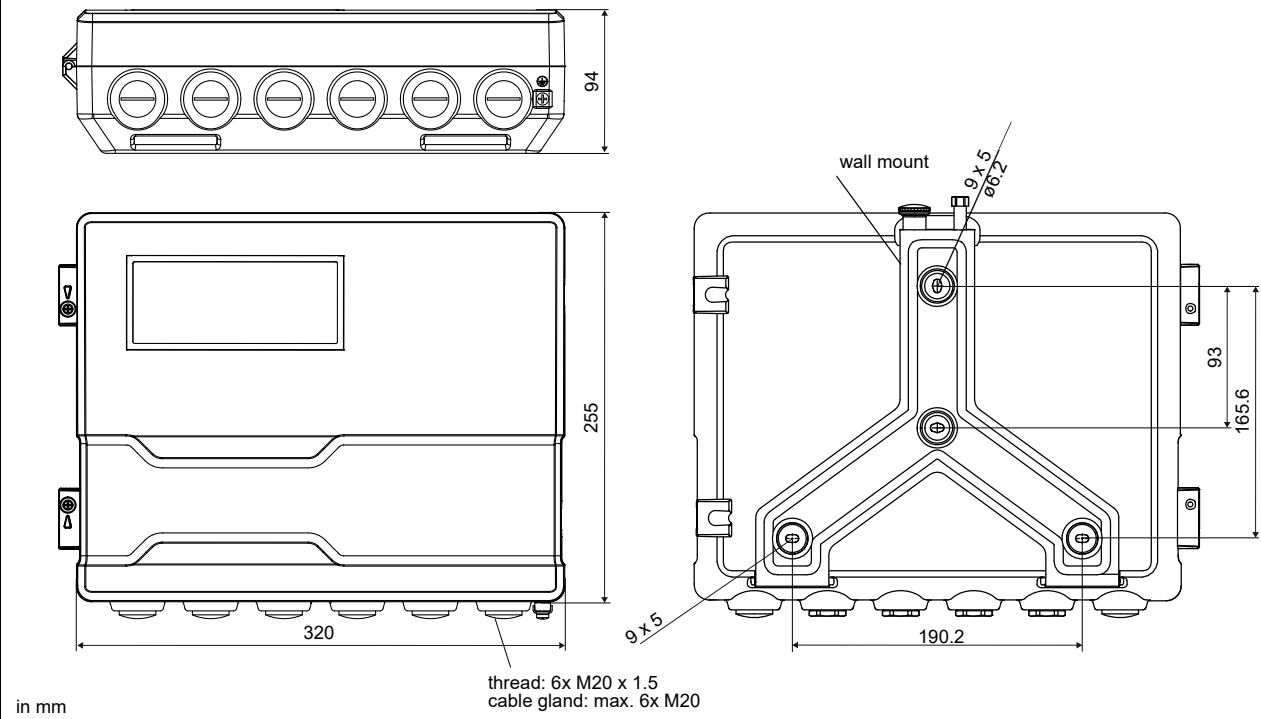
<sup>2</sup> for transit time difference principle and reference conditions

<sup>3</sup> outside the explosive atmosphere (housing cover open)

<sup>4</sup> with inputs and including parametrisation of the transmitter

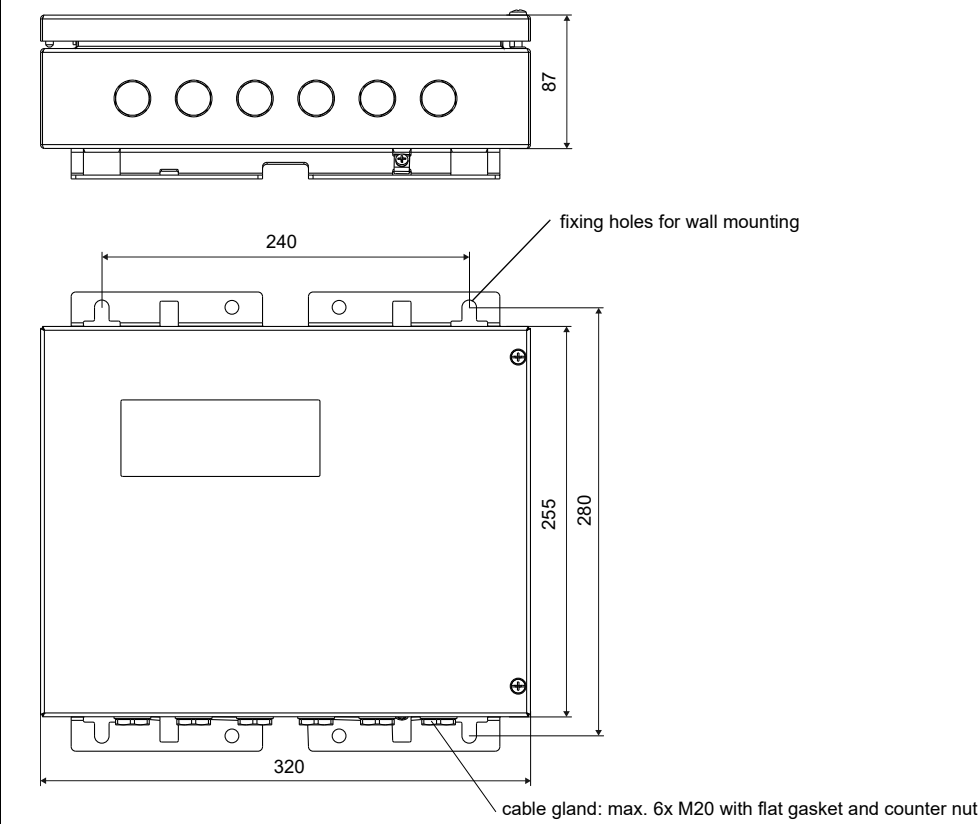
### Dimensions

\*72\*\*\*\_\*\*\*\*A



in mm

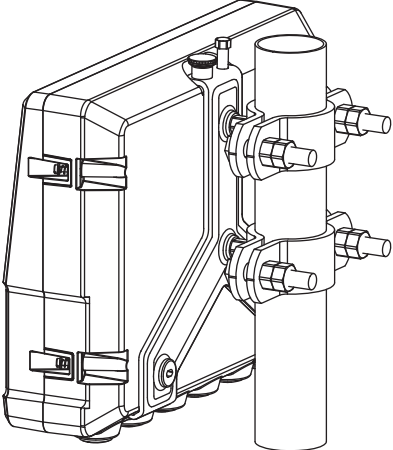
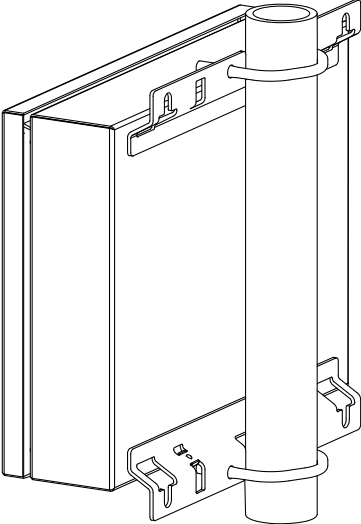
\*72\*\*\*\_\*\*\*\*S



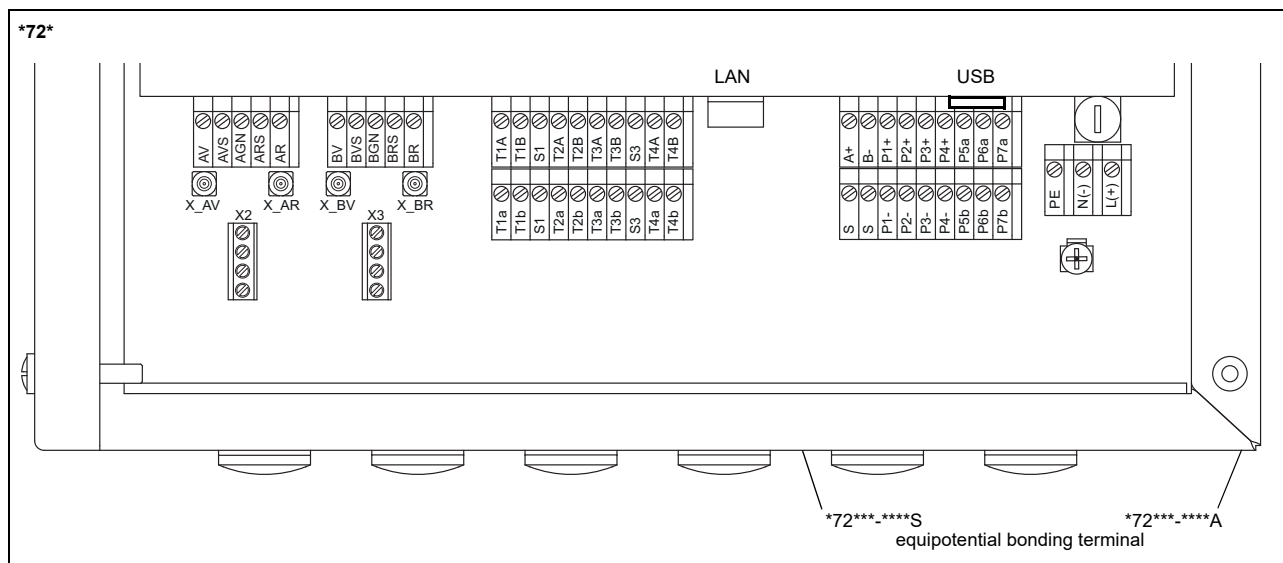
in mm



## 2" pipe mounting kit

<p><b>*72***.****A</b></p> 	<p>order code: ACC-PE-*721-/PMK4</p>
<p><b>*72***.****S</b></p> 	<p>order code: ACC-PE-*721-/PMK6</p>

### Terminal assignment



**power supply<sup>1</sup>**

terminal	connection (AC)	connection (DC)
PE	earth	earth
N(-)	neutral	-
L(+)	phase	+

**transducers**

transducer cable (transducers ****g*, ****LI*), extension cable				transducer cable (transducers ****52)			
measuring channel A		measuring channel B			measuring channel A	measuring channel B	
terminal	connection	terminal	connection	transducer	terminal	terminal	connection
AV	signal	BV	signal	↑	X_AV	X_BV	SMB connector
AVS	shield	BVS	shield				
ARS	shield	BRS	shield	↗	X_AR	X_BR	SMB connector
AR	signal	BR	signal				

**outputs<sup>1, 2</sup>**

terminal	connection	terminal	connection	communication interface
P1+...P4+ P1-...P4-	current output, voltage output, frequency output, binary output (Reed relay), HART (P1)	A+	signal +	<ul style="list-style-type: none"> <li>• RS485<sup>1</sup></li> <li>• Modbus RTU<sup>1</sup></li> <li>• BACnet MS/TP<sup>1</sup></li> <li>• M-Bus<sup>1</sup></li> <li>• Profibus PA<sup>1</sup></li> <li>• FF H1<sup>1</sup></li> </ul>
		B-	signal -	
P5a...P7a P5b...P7b	binary output (optorelay)	S	shield	
		USB	type B Hi-Speed USB 2.0 Device	<ul style="list-style-type: none"> <li>• service (FluxDiag/FluxDiagReader)</li> </ul>
		LAN	RJ45 10/100 Mbps Ethernet	<ul style="list-style-type: none"> <li>• service (FluxDiag/FluxDiagReader)</li> <li>• BACnet IP</li> <li>• Modbus TCP</li> </ul>

**analog inputs<sup>1, 2</sup>**

terminal	temperature probe		passive sensor connection	active sensor connection
	direct connection	connection with extension cable		
T1a...T4a	red	red	not connected	not connected
T1A...T4A	red/blue	grey	-	+
T1b...T4b	white/blue	blue	+	not connected
T1B...T4B	white	white	not connected	-
S1, S3	shield	shield	not connected	not connected

**binary inputs<sup>1, 2</sup>**

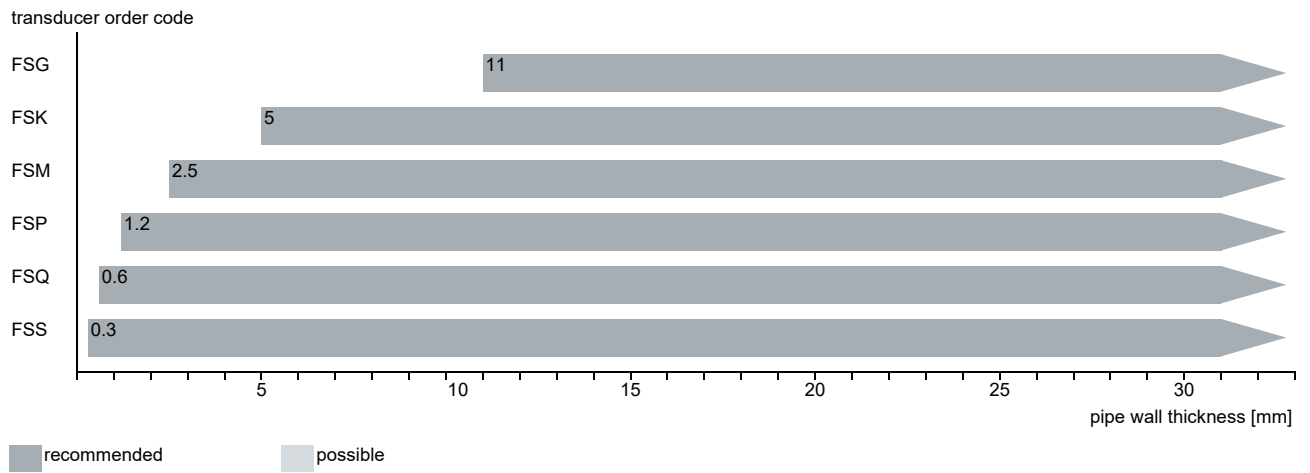
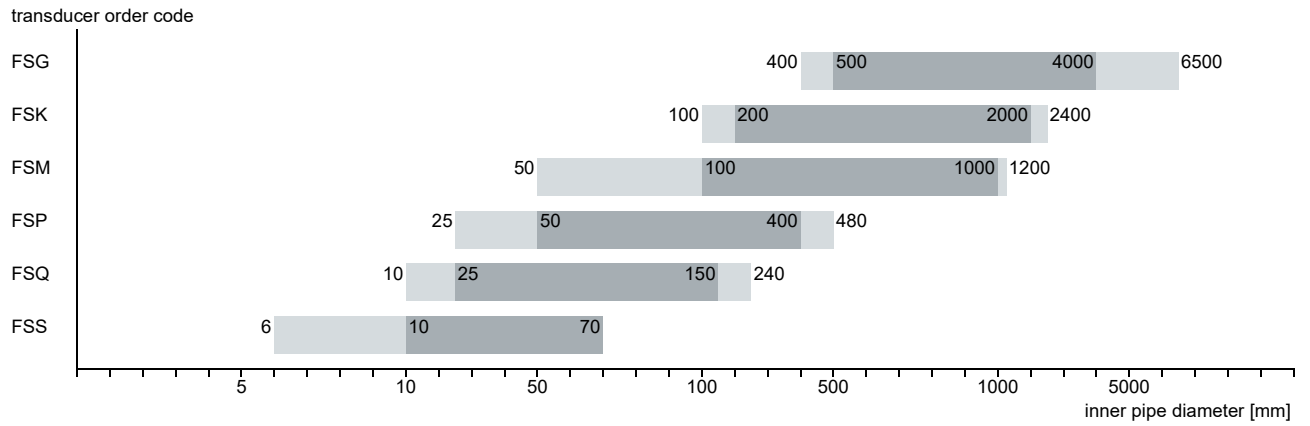
terminal
P1+...P2+, P1-...P2-

<sup>1</sup> cable (by customer):  
 - e.g. flexible wires, with insulated wire ferrules, wire cross-section: 0.25...2.5 mm<sup>2</sup>  
 - outer diameter of the cable (\*721\*\*..\*\*\*\*\*S with ferrite nut): max. 7.6 mm

<sup>2</sup> The number, type and terminal assignment are customised.

# Transducers

## Transducer selection

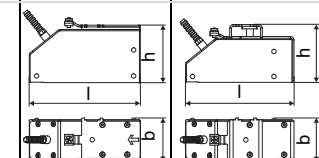







### Transducer order code



1, 2	3	4	5, 6	7, 8	9...11	no. of character				
transducer	transducer frequency	-	ambient temperature	explosion protection	connection system	-	extension cable	/	option	description
FS										set of ultrasonic flow transducers for liquids measurement, shear wave
	G									0.2 MHz
	K									0.5 MHz
	M									1 MHz
	P									2 MHz
	Q									4 MHz
	S									8 MHz
			N							normal temperature range
			E							extended temperature range
				NN						not explosion-proof
				A2						ATEX zone 2/IECEX zone 2
				A1						ATEX zone 1/IECEX zone 1
				F2						FM Class I Div. 2
					TS					direct connection or connection via junction box
							XXX			0 m: without extension cable > 0 m: with extension cable
								LC		long transducer cable
								IP68		degree of protection IP68
								OS		housing with stainless steel 316

## Technical data

### Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS)





order code		FSG-N**TS/**	FSK-N**TS/**	FSM-N**TS/**	FSP-N**TS/**	FSQ-N**TS/**	FSS-N**TS/**	
technical type		C(DL)G1N52	C(DL)K1N52	C(DL)M2N52	C(DL)P2N52	C(DL)Q2N52	CDS1N52	
transducer frequency	MHz	0.2	0.5	1	2	4	8	
<b>inner pipe diameter d</b>								
min. extended	mm	400	100	50	25	10	6	
min. recommended	mm	500	200	100	50	25	10	
max. recommended	mm	4000	2000	1000	400	150	70	
max. extended	mm	6500	2400	1200	480	240	70	
<b>pipe wall thickness</b>								
min.	mm	11	5	2.5	1.2	0.6	0.3	
<b>material</b>								
housing		PEEK with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)					stainless steel 304 (1.4301)	
contact surface		PEEK					PEI	
degree of protection		IP67					IP65	
<b>transducer cable</b>								
type		1699						
length	m	5		4	3		2	
length (**-*****/LC)	m	9						-
<b>dimensions</b>								
length l	mm	129.5	126.5	64	40		25	
width b	mm	51	51	32	22		13	
height h	mm	67	67.5	40.5	25.5		17	
dimensional drawing								
weight (without cable)	kg	0.47	0.36	0.066	0.016		0.004	
<b>pipe surface temperature</b>								
min.	°C	-40					-30	
max.	°C	+130					+130	
<b>ambient temperature</b>								
min.	°C	-40					-30	
max.	°C	+130					+130	
temperature compensation		x					-	
<b>explosion protection</b>								
<b>• ATEX/IECEx</b>								
order code		FSG-NA2TS/**	FSK-NA2TS/**	FSM-NA2TS/**	FSP-NA2TS/**	FSQ-NA2TS/**	-	
pipe surface temperature (Ex)								
• min.	°C	-55					-	
• max.	°C	gas: +190, dust: +180					-	
marking		CE 0637  II 3G II 2D Ex nA IIC T6...T3 Gc Ex tb IIIC T80 °C...T185 °C Db					-	
certification ATEX		IBExU10ATEX1163 X					-	
certification IECEx		IECEx IBE 12.0005X					-	
<b>• FM</b>								
order code		FSG-NF2TS/**	FSK-NF2TS/**	FSM-NF2TS/**	FSP-NF2TS/**	FSQ-NF2TS/**	FSS-NF2TS/**	
pipe surface temperature (Ex)								
• min.	°C	-40					-	
• max.	°C	+125		+190			+125	
degree of protection		IP66						
marking		 NI/Cl. I, II, III/Div. 2 / GP A, B, C, D, E, F, G/ Temp. Codes dwg 3860						

**Shear wave transducers (zone 2 - nonEx, TS, IP68)**

order code		FSG-N**TS/IP68	FSK-N**TS/IP68	FSM-N**TS/IP68	FSP-N**TS/IP68
technical type		CDG1LI8	CDK1LI8	CDM2LI8	CDP2LI8
transducer frequency	MHz	0.2	0.5	1	2
<b>inner pipe diameter d</b>					
min. extended	mm	400	100	50	25
min. recommended	mm	500	200	100	50
max. recommended	mm	4000	2000	1000	400
max. extended	mm	6500	2400	1200	480
<b>pipe wall thickness</b>					
min.	mm	11	5	2.5	1.2
<b>material</b>					
housing		PEEK with stainless steel cover 316Ti (1.4571)			
contact surface		PEEK			
degree of protection		IP68 <sup>1</sup>			
<b>transducer cable</b>					
type		2550			
length	m	12			
<b>dimensions</b>					
length l	mm	130		72	
width b	mm	54		32	
height h	mm	83.5		46	
dimensional drawing					
weight (without cable)	kg	0.43		0.085	
<b>pipe surface temperature</b>					
min.	°C	-40			
max.	°C	+100			
<b>ambient temperature</b>					
min.	°C	-40			
max.	°C	+100			
temperature compensation		x			
<b>explosion protection</b>					
<b>• ATEX/IECEX</b>					
order code		FSG-NA2TS/IP68	FSK-NA2TS/IP68	FSM-NA2TS/IP68	FSP-NA2TS/IP68
pipe surface temperature (Ex)					
• min.	°C	-40			
• max.	°C	gas: +90, dust: +80			
marking		CE 0637 Ex II 3G II 2D Ex nA IIC T6...T5 Gc Ex tb IIIC T80 °C...T85 °C Db			
certification ATEX		IBExU10ATEX1163 X			
certification IECEX		IECEX IBE 12.0005X			

<sup>1</sup> test conditions: 3 months/2 bar (20 m)/20 °C

**Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS, extended temperature range)**

order code		FSG-ENNTS/**	FSK-ENNTS/**	FSM-E**TS/**	FSP-E**TS/**	FSQ-E**TS/**
technical type		C(DL)G1E52	C(DL)K1E52	C(DL)M2E52	C(DL)P2E52	C(DL)Q2E52
transducer frequency	MHz	0.2	0.5	1	2	4
<b>inner pipe diameter d</b>						
min. extended	mm	400	100	50	25	10
min. recommended	mm	500	200	100	50	25
max. recommended	mm	4000	2000	1000	400	150
max. extended	mm	6500	2400	1200	480	240
<b>pipe wall thickness</b>						
min.	mm	11	5	2.5	1.2	0.6
<b>material</b>						
housing		PPSU with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)		PI with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)		
contact surface		PPSU		PI		
degree of protection		IP65		IP56		
<b>transducer cable</b>						
type		1699		6111		
length	m	5		4		3
length (***-*****/LC)	m	9		9		
<b>dimensions</b>						
length l	mm	129.5		64		40
width b	mm	51		32		22
height h	mm	67		40.5		25.5
dimensional drawing						
weight (without cable)	kg	0.82		0.066		0.017
<b>pipe surface temperature</b>						
min.	°C	-40		-30		-30
max.	°C	+170		+240 <sup>1</sup>		+200
<b>ambient temperature</b>						
min.	°C	-40		-30		-30
max.	°C	+170		+40 +60 <sup>2</sup> +200 <sup>3</sup>		+200
temperature compensation		x		x		
<b>explosion protection</b>						
<b>• ATEX/IECEX</b>						
order code		-	-	FSM-EA2TS/**	FSP-EA2TS/**	FSQ-EA2TS/**
pipe surface temperature (Ex)				-45		
• min.	°C	-		gas: +235 <sup>1</sup> , dust: +225 <sup>1</sup>		
• max.	°C	-				
marking		-		CE 0637 Ex II3G II2D Ex nA IIC T6...T2 Gc Ex tb IIIA T80 °C...230 °C Db		
certification ATEX		-		IBExU10ATEX1163 X		
certification IECEX		-		IECEX IBE 12.0005X		
<b>• FM</b>						
order code		-	-	FSM-EF2TS/**	FSP-EF2TS/**	FSQ-EF2TS/**
pipe surface temperature (Ex)				-40		
• min.	°C	-		+235 <sup>1</sup>		
• max.	°C	-				
degree of protection		-		IP66		
marking		-		 NI/CI, I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860		

<sup>1</sup> > +200 °C:

Variofix C without cover or Variofix L  
observe the insulation instruction  
Ex: ambient temperature max. +40 °C

<sup>2</sup> pipe surface temperature +200...+240 °C: Variofix C without cover



<sup>3</sup> pipe surface temperature max. +200 °C

**Shear wave transducers (zone 1, TS)**

order code		FSG-N*1TS/**	FSK-N*1TS/**	FSM-N*1TS/**	FSP-N*1TS/**	FSQ-N*1TS/**
technical type		C(DL)G1N81	C(DL)K1N81	C(DL)M2N81	C(DL)P2N81	C(DL)Q2N81
transducer frequency	MHz	0.2	0.5	1	2	4
<b>inner pipe diameter d</b>						
min. extended	mm	400	100	50	25	10
min. recommended	mm	500	200	100	50	25
max. recommended	mm	4000	2000	1000	400	150
max. extended	mm	6500	2400	1200	480	240
<b>pipe wall thickness</b>						
min.	mm	11	5	2.5	1.2	0.6
<b>material</b>						
housing		PEEK with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)				
contact surface		PEEK				
degree of protection		IP65	IP66			IP65
<b>transducer cable</b>						
type		1699				
length	m	5		4		3
length (**-*****/LC)	m	9				
<b>dimensions</b>						
length l	mm	129.5	126.5	64		40
width b	mm	51	51	32		22
height h	mm	67	67.5	40.5		25.5
dimensional drawing						
weight (without cable)	kg	0.47	0.36	0.066		0.016
<b>pipe surface temperature</b>						
min.	°C	-40				
max.	°C	+130				
<b>ambient temperature</b>						
min.	°C	-40				
max.	°C	+130				
temperature compensation		x				
<b>explosion protection</b>						
• ATEX/IECEX						
order code		FSG-NA1TS/**	FSK-NA1TS/**	FSM-NA1TS/**	FSP-NA1TS/**	FSQ-NA1TS/**
pipe surface temperature (Ex)						
• min.	°C	-55				
• max.	°C	+180				
marking		CE 0637 Ex II2G II2D Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T185 °C Db				
certification ATEX		IBExU07ATEX1168 X				
certification IECEX		IECEX IBE 08.0007X				




**Shear wave transducers (zone 1, TS, IP68)**




order code		FSG-N*1TS/IP68	FSK-N*1TS/IP68	FSM-N*1TS/IP68	FSP-N*1TS/IP68
technical type		CDG1LI1	CDK1LI1	CDM2LI1	CDP2LI1
transducer frequency	MHz	0.2	0.5	1	2
<b>inner pipe diameter d</b>					
min. extended	mm	400	100	50	25
min. recommended	mm	500	200	100	50
max. recommended	mm	4000	2000	1000	400
max. extended	mm	6500	2400	1200	480
<b>pipe wall thickness</b>					
min.	mm	11	5	2.5	1.2
<b>material</b>					
housing		PEEK with stainless steel cover 316Ti (1.4571)			
contact surface		PEEK			
degree of protection		IP68 <sup>1</sup>			
<b>transducer cable</b>					
type		2550			
length	m	12			
<b>dimensions</b>					
length l	mm	130		72	
width b	mm	54		32	
height h	mm	83.5		46	
dimensional drawing					
weight (without cable)	kg	0.43		0.085	
<b>pipe surface temperature</b>					
min.	°C	-40			
max.	°C	+100			
<b>ambient temperature</b>					
min.	°C	-40			
max.	°C	+100			
temperature compensation		x			
<b>explosion protection</b>					
<b>• ATEX/IECEX</b>					
order code		FSG-NA1TS/IP68	FSK-NA1TS/IP68	FSM-NA1TS/IP68	FSP-NA1TS/IP68
pipe surface temperature (Ex)					
• min.	°C	-40			
• max.	°C	+80			
marking		CE 0637 Ex II2G II2D Ex q IIC T6...T5 Gb Ex tb IIIC T80 °C...T85 °C Db			
certification ATEX		IBExU07ATEX1168 X			
certification IECEX		IECEX IBE 08.0007X			

<sup>1</sup> test conditions: 3 months/2 bar (20 m)/20 °C

**Shear wave transducers (zone 1, TS, extended temperature range)**

order code		FSG-E*1TS/**	FSK-E*1TS/**
technical type		C(DL)G1E83	C(DL)K1E83
transducer frequency	MHz	0.2	0.5
<b>inner pipe diameter d</b>			
min. extended	mm	400	100
min. recommended	mm	500	200
max. recommended	mm	4000	2000
max. extended	mm	6500	2400
<b>pipe wall thickness</b>			
min.	mm	11	5
<b>material</b>			
housing		PPSU with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)	
contact surface		PPSU	
degree of protection		IP65	
<b>transducer cable</b>			
type		1699	
length	m	5	
length (**-*****/LC)	m	9	
<b>dimensions</b>			
length l	mm	129.5	
width b	mm	51	
height h	mm	67	
dimensional drawing			
weight (without cable)	kg	0.82	
<b>pipe surface temperature</b>			
min.	°C	-40	
max.	°C	+170	
<b>ambient temperature</b>			
min.	°C	-40	
max.	°C	+170	
temperature compensation		x	
<b>explosion protection</b>			
<b>• ATEX/IECEX</b>			
order code		FSG-EA1TS/**	FSK-EA1TS/**
pipe surface temperature (Ex)			
• min.	°C	-50	
• max.	°C	+155	
marking		CE 0637 Ex II 2G II 2D Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T160 °C Db	
certification ATEX		IBExU07ATEX1168 X	
certification IECEX		IECEX IBE 08.0007X	

**Shear wave transducers (zone 1, TS, extended temperature range)**

order code		FSM-E*1TS/**	FSP-E*1TS/**	FSQ-E*1TS/**
technical type		C(DL)M2E85	C(DL)P2E85	C(DL)Q2E85
transducer frequency	MHz	1	2	4
<b>inner pipe diameter d</b>				
min. extended	mm	50	25	10
min. recommended	mm	100	50	25
max. recommended	mm	1000	400	150
max. extended	mm	1200	480	240
<b>pipe wall thickness</b>				
min.	mm	2.5	1.2	0.6
<b>material</b>				
housing		PI with stainless steel cover 304 (1.4301), ***_*****/OS: 316L (1.4404)		
contact surface		PI		
degree of protection		IP66		IP56
<b>transducer cable</b>				
type		6111		
length	m	4		3
length (***_*****/LC)	m	9		
<b>dimensions</b>				
length l	mm	64		40
width b	mm	32		22
height h	mm	40.5		
dimensional drawing				
weight (without cable)	kg	0.066		0.017
<b>pipe surface temperature</b>				
min.	°C	-30		-30
max.	°C	+240 <sup>1</sup>		+200
<b>ambient temperature</b>				
min.	°C	-30		-30
max.	°C	+40 +200 <sup>2</sup>		+200
temperature compensation		x		
<b>explosion protection</b>				
<b>• ATEX/IECEx</b>				
order code		FSM-EA1TS/**	FSP-EA1TS/**	FSQ-EA1TS/**
pipe surface temperature (Ex)				
• min.	°C	-45		
• max.	°C	+225 <sup>1</sup>		
marking		CE 0637  II2G II2D Ex q IIC T6...T2 Gb Ex tb IIIA T80 °C...T230 °C Db		
certification ATEX		IBExU07ATEX1168 X		
certification IECEx		IECEx IBE 08.0007X		

<sup>1</sup> > +200 °C :  
 Variofix L or Variofix C  
 observe the insulation instruction  
 ambient temperature max. +40 °C

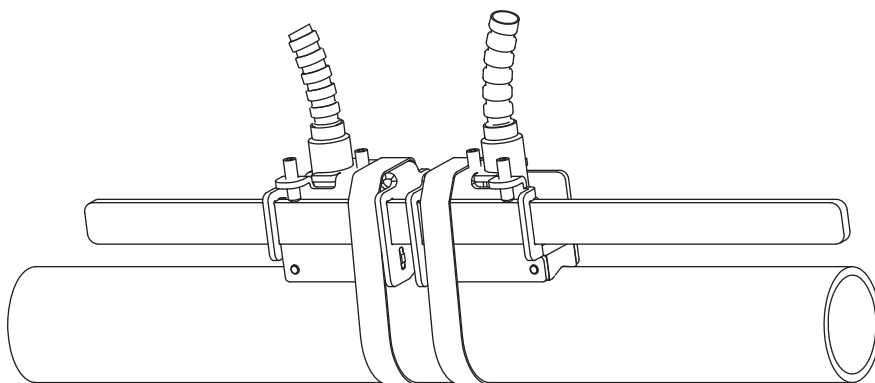
<sup>2</sup> pipe surface temperature max. +200 °C

# Transducer mounting fixture

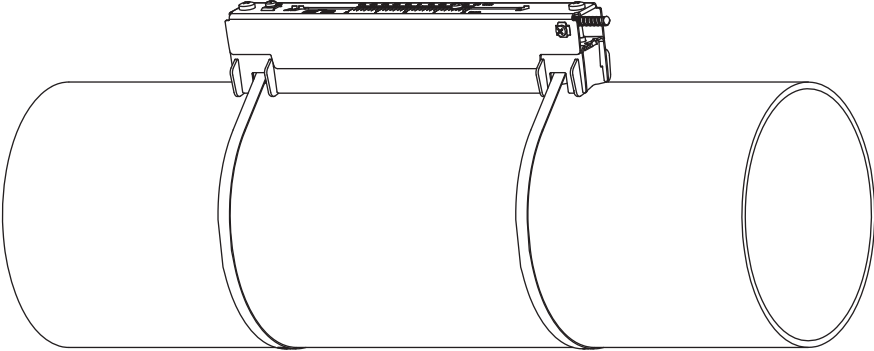
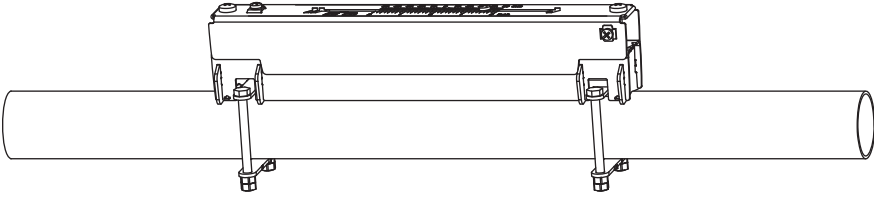
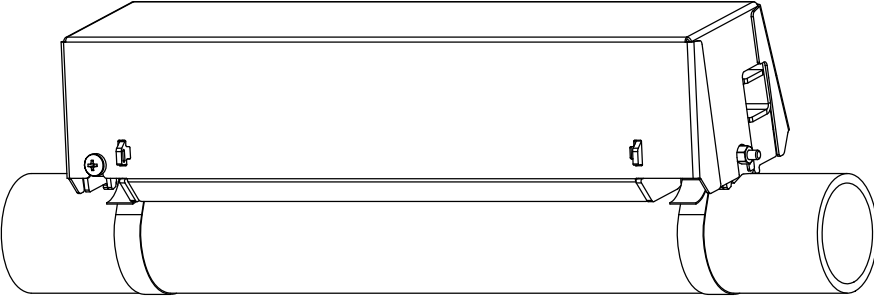
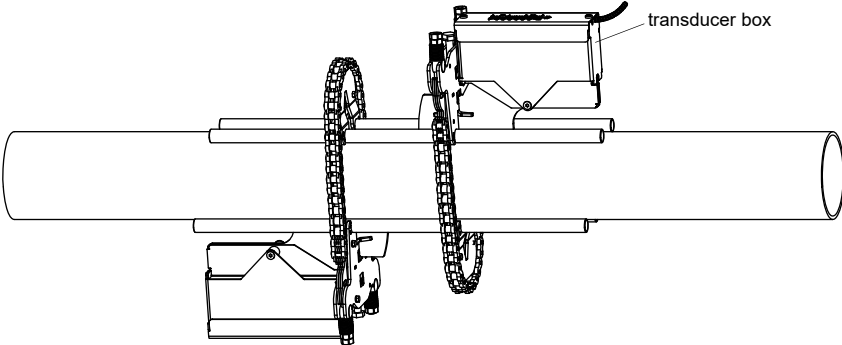
## Order code

1, 2	3	4	5	6	7...9	no. of character
transducer mounting fixture	transducer	measurement arrangement	size	fixation	outer pipe diameter	option
						description
VL						Variofix L
VC						Variofix C
WI						transducer box for WaveInjector
	K					transducers with transducer frequency G, K
	M					transducers with transducer frequency M, P
	Q					transducers with transducer frequency Q
	S					transducers with transducer frequency S
		D				reflection arrangement or diagonal arrangement
		R				reflection arrangement
			S			small
			M			medium
			L			large
				B		bolts
				S		tension straps
				W		welding
				N		without fixation
					002	10...20 mm
					004	20...40 mm
					T36	40...360 mm
					013	10...130 mm
					036	130...360 mm
					092	360...920 mm
					200	920...2000 mm
					450	2000...4500 mm
					940	4500...9400 mm
					NDR	any
						IP68 for transducers with degree of protection IP68
						OS housing with stainless steel 316
						Z special design

**Variofix L (VLS)**



transducer frequency: S  
 material: stainless steel 304 (1.4301),  
 303 (1.4305)

<p><b>Variofix L (VLK, VLM, VLQ)</b></p> 	<p>material: stainless steel 304 (1.4301), 301 (1.4310), 410 (1.4006)  option OS: 316Ti (1.4571), 316L (1.4404), 17-7PH (1.4568)  inner length:  <b>VLK:</b> 348 mm,  option IP68: 368 mm  <b>VLM:</b> 234 mm  <b>VLQ:</b> 176 mm  dimensions:  <b>VLK:</b> 423 x 90 x 93 mm  option IP68: 443 x 94 x 105 mm  <b>VLM:</b> 309 x 57 x 63 mm  <b>VLQ:</b> 247 x 43 x 47 mm</p>
<p><b>Variofix L with bolt mounting plates (VL**B)</b></p> 	<p>material: stainless steel 304 (1.4301), 301 (1.4310), 410 (1.4006)  option OS: 316Ti (1.4571), 316L (1.4404), 17-7PH (1.4568)  inner length:  <b>VLM:</b> 234 mm  <b>VLQ:</b> 176 mm  dimensions:  <b>VLM:</b> 309 x 57 x 63 mm  <b>VLQ:</b> 247 x 43 x 47 mm  outer pipe diameter:  max. 48 mm</p>
<p><b>Variofix C (VC)</b></p> 	<p>material: stainless steel 316Ti (1.4571)  inner length:  <b>VCK-*L:</b> 500 mm  <b>VCK-*S:</b> 350 mm  <b>VCM:</b> 400 mm  <b>VCQ:</b> 250 mm  dimensions:  <b>VCK-*L:</b> 560 x 126 x 125 mm  <b>VCK-*S:</b> 410 x 126 x 125 mm  <b>VCM:</b> 460 x 96 x 82 mm  <b>VCQ:</b> 310 x 85 x 71 mm</p>
<p><b>transducer box WI for WaveInjector</b></p>  <p style="text-align: right;">transducer box</p>	<p>see Technical specification TSWaveInjectorVx-x</p>

## Coupling materials for transducers

	normal temperature range (4th character of transducer order code = N)		extended temperature range (4th character of transducer order code = E)			WaveInjector WI-400	
	< 100 °C	< 170 °C	< 150 °C	< 200 °C	200...240 °C	< 280 °C	280...400 °C
< 24 h	coupling compound type N or coupling foil type VT	coupling compound type E or coupling foil type VT	coupling compound type E or coupling foil type VT	coupling compound type E or H or coupling foil type VT	coupling foil type TF	coupling foil type A and coupling foil type VT	coupling foil type B and coupling foil type VT
long time measurement	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type TF	coupling foil type A and coupling foil type VT	coupling foil type B and coupling foil type VT

type VT: fluid temperature 200 °C: min. 2 years

### Technical data

type	ambient temperature °C
coupling compound type N	-30...+130
coupling compound type E	-30...+200
coupling compound type H	-30...+250
coupling foil type A	max. 280
coupling foil type B	280...400
coupling foil type VT	-10...+200
coupling foil type TF	200...240

### Connection systems

connection system TS		
connection with extension cable	direct connection	transducers technical type
<p>JB01</p>		****8*
<p>JB01, JBP2, JBP3</p>		****L*
<p>JB02, JB03, JB04</p>		****52

**Cable**

transducer cable				
type		1699	2550	6111
weight	kg/m	0.094	0.035	0.092
ambient temperature	°C	-55...+200	-40...+100	-100...+225
properties			longitudinal watertight	
cable jacket				
material		PTFE	PUR	PFA
outer diameter	mm	2.9	5.2 ±0.2	2.7
thickness	mm	0.3	0.9	0.5
colour		brown	grey	white
shield		x	x	x
sheath				
material		stainless steel 304 (1.4301) option OS: 316Ti (1.4571)	-	stainless steel 304 (1.4301) option OS: 316Ti (1.4571)
outer diameter	mm	8	-	8

extension cable				
type		2615	5245	
order code		ACC-PE- GNNN-/EXEXXXX	ACC-PE- GNNN-/EXA1XXX	
weight	kg/m	0.18	0.38	
ambient temperature	°C	-30...+70	-30...+70	
properties		halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	
cable jacket				
material		PUR	PUR	
outer diameter	mm	max. 12	max. 12	
thickness	mm	2	2	
colour		black	black	
shield		x	x	
sheath				
material		-	steel wire braid with copolymer sheath	
outer diameter	mm	-	max. 15.5	

XXX - cable length in m

**Cable length**

transducer frequency		F, G, H, K		M, P		Q		S	
connection system TS									
transducers technical type		x		x		x		x	
*(DR)***8*	m	5	≤ 300	4	≤ 300	3	≤ 90	-	-
option LC: *(LT)***8*	m	9	≤ 300	9	≤ 300	9	≤ 90	-	-
*(DR)***5*	m	5	≤ 300	4	≤ 300	3	≤ 90	2	≤ 40
option LC: *(LT)***5*	m	9	≤ 300	9	≤ 300	9	≤ 90	-	-
option IP68: ****L*	m	12	≤ 300	12	≤ 300	-	-	-	-

x - transducer cable length

l - max. length of extension cable (depending on the application)

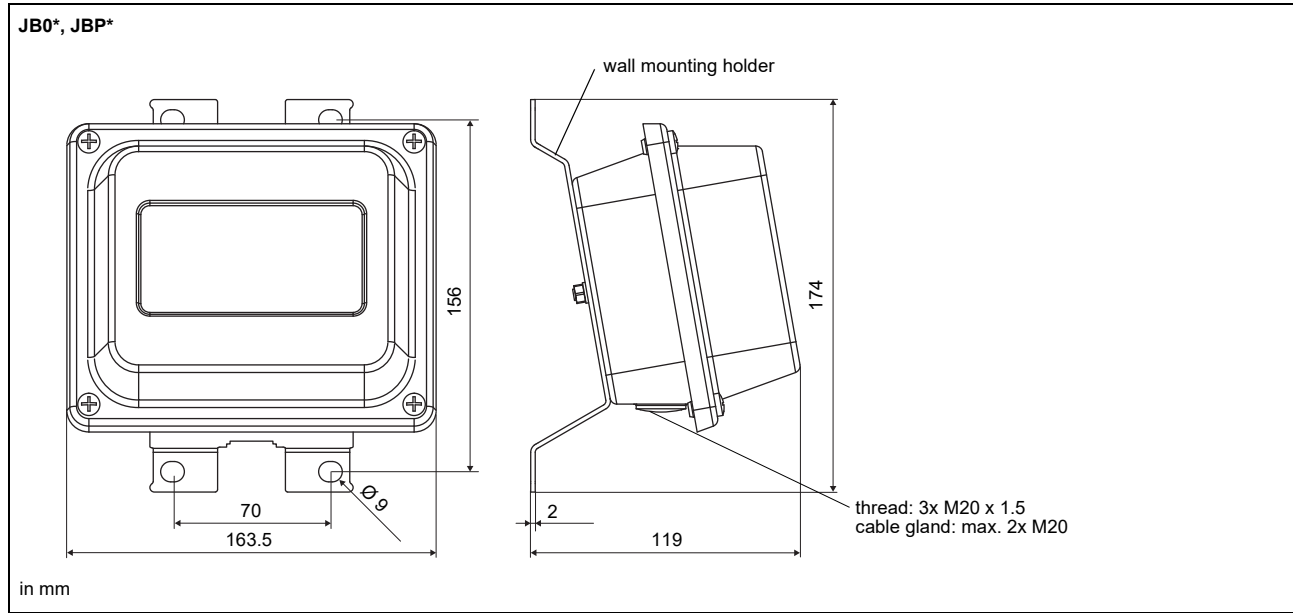


# Junction box

## Technical data

JB01S4E3M, JBP2, JBP3			
weight	kg	1.2 kg	
fixation		wall mounting optional: 2" pipe mounting	
<b>material</b>			
housing		stainless steel 316L (1.4404)	
gasket		silicone	
degree of protection		IP67	
<b>ambient temperature</b>			
min.	°C	-40	
max.	°C	+80	
<b>explosion protection</b>			
• ATEX/IECEX (zone 1)			
junction box		JB01S4E3M	
marking		CE 0637 Ex II2G II2D Ex eb mb IIC T6...T4 Gb Ex tb IIIC T100 °C Db Ta -40...+70/80 °C	
certification ATEX		IBExU06ATEX1161	
certification IECEx		IECEX IBE 08.0006	
type of protection		gas: increased safety decoupled network: encapsulation dust: protection by enclosure	
• ATEX (zone 2)			
junction box		JBP2	
marking		CE Ex II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIIC T 100 °C Dc Ta -40...+(70)80 °C	
<b>Connection</b>			
<b>Transducers</b>			
terminal strip	terminal	connection	transducer
KL1	V	signal	↑
	VS	internal shield	
	RS	internal shield	⤴
	R	signal	
<b>Extension cable</b>			
terminal strip	terminal	connection	
KL2	TV	signal	
	TVS	internal shield	
	TRS	internal shield	
	TR	signal	
JB02, JB03, JB04			
weight	kg	1.2 kg	
fixation		wall mounting optional: 2" pipe mounting	
<b>material</b>			
housing		stainless steel 316L (1.4404)	
gasket		silicone	
degree of protection		IP67	
<b>ambient temperature</b>			
min.	°C	-40	
max.	°C	+80	
<b>explosion protection</b>			
• ATEX			
junction box		JB02	
marking		CE Ex II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIIC T 100 °C Dc Ta -40...+(70)80 °C	
• FM			
junction box		JB04	
marking		NI/Cl. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ T6 Ta = -40...+60 °C	
<b>Connection</b>			
<b>Transducers</b>			
terminal strip	terminal	connection	transducer
	XV	SMB connector	↑
	XR	SMB connector	
<b>Extension cable</b>			
terminal strip	terminal	connection	
KL2	TV	signal	
	TVS	internal shield	
	TRS	internal shield	
	TR	signal	

### Dimensions

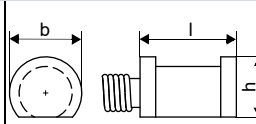


### 2" pipe mounting kit

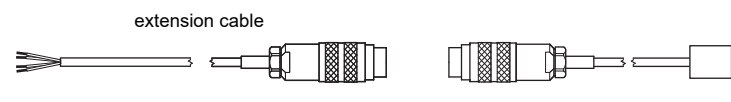



# Clamp-on temperature probe (optional)

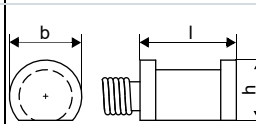

## Technical data

PT12N	
design	clamp-on with connector
type	Pt100
connection	4-wire
measuring range	°C -30...+250
accuracy T	$\pm(0.15 \text{ °C} + 2 \cdot 10^{-3} \cdot  T \text{ [°C] })$ class A
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ( $3 \text{ K} < \Delta T < 6 \text{ K}$ ), more corresponding to EN 1434-1
response time	s 50
housing	aluminum
degree of protection	IP66
<b>dimensions</b>	
length l	mm 20
width b	mm 15
height h	mm 13
dimensional drawing	
weight	kg 0.25 (without connector)
<b>accessories</b>	
thermal conductivity paste 200 °C	x
thermal conductivity foil 250 °C	x

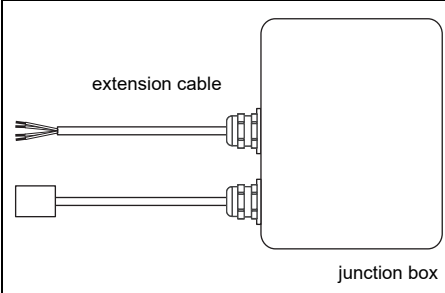

  

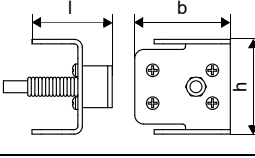
Connection system																			
<b>direct connection/connection with extension cable</b>																			
																			
<b>Connection</b>																			
	<table border="1"> <thead> <tr> <th>temperature probe</th> <th>extension cable</th> <th>connector</th> </tr> <tr> <td></td> <td></td> <th>pin</th> </tr> </thead> <tbody> <tr> <td>red</td> <td>grey</td> <td>2</td> </tr> <tr> <td>red/blue</td> <td>red</td> <td>6</td> </tr> <tr> <td>white/blue</td> <td>blue</td> <td>1</td> </tr> <tr> <td>white</td> <td>white</td> <td>7</td> </tr> </tbody> </table> 	temperature probe	extension cable	connector			pin	red	grey	2	red/blue	red	6	white/blue	blue	1	white	white	7
temperature probe	extension cable	connector																	
		pin																	
red	grey	2																	
red/blue	red	6																	
white/blue	blue	1																	
white	white	7																	
<b>Cable</b>																			
	<table border="1"> <thead> <tr> <th></th> <th>temperature probe</th> <th>extension cable</th> </tr> </thead> <tbody> <tr> <td>type</td> <td>4 x 0.25 mm<sup>2</sup> black</td> <td>LIYCY 8 x 0.14 mm<sup>2</sup> grey</td> </tr> <tr> <td>standard length</td> <td>m 3</td> <td>5/10/25</td> </tr> <tr> <td>max. length</td> <td>m -</td> <td>200</td> </tr> <tr> <td>cable jacket</td> <td>PTFE</td> <td>PVC</td> </tr> </tbody> </table>		temperature probe	extension cable	type	4 x 0.25 mm <sup>2</sup> black	LIYCY 8 x 0.14 mm <sup>2</sup> grey	standard length	m 3	5/10/25	max. length	m -	200	cable jacket	PTFE	PVC			
	temperature probe	extension cable																	
type	4 x 0.25 mm <sup>2</sup> black	LIYCY 8 x 0.14 mm <sup>2</sup> grey																	
standard length	m 3	5/10/25																	
max. length	m -	200																	
cable jacket	PTFE	PVC																	

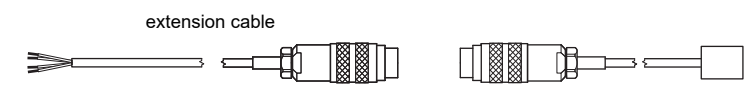
PT12N	
design	clamp-on nonEx or ATEX
type	Pt100
connection	4-wire
measuring range	°C -30...+250
accuracy T	$\pm(0.15 \text{ °C} + 2 \cdot 10^{-3} \cdot  T \text{ [°C] })$ class A
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ( $3 \text{ K} < \Delta T < 6 \text{ K}$ ), more corresponding to EN 1434-1
response time	s 50
housing	aluminum
degree of protection	IP66
<b>dimensions</b>	
length l	mm 20
width b	mm 15
height h	mm 13
dimensional drawing	
weight	kg 0.25
<b>accessories</b>	
thermal conductivity foil 250 °C	x
<b>explosion protection (optional)</b>	
• ATEX	
marking	 II3G Ex nA IIC T6...T2 Gc Ta -30...+250 °C

Connection system																
<b>connection with extension cable</b>	<b>direct connection</b>															
																
<b>Connection</b>																
	<table border="1"> <thead> <tr> <th>temperature probe</th> </tr> </thead> <tbody> <tr> <td>red</td> </tr> <tr> <td>red/blue</td> </tr> <tr> <td>white/blue</td> </tr> <tr> <td>white</td> </tr> </tbody> </table>	temperature probe	red	red/blue	white/blue	white										
temperature probe																
red																
red/blue																
white/blue																
white																
<b>Cable</b>																
	<table border="1"> <thead> <tr> <th></th> <th>temperature probe</th> <th>extension cable</th> </tr> </thead> <tbody> <tr> <td>type</td> <td>4 x 0.25 mm<sup>2</sup> black</td> <td>LIYCY 8 x 0.14 mm<sup>2</sup> grey</td> </tr> <tr> <td>standard length</td> <td>m 3</td> <td>5/10/25</td> </tr> <tr> <td>max. length</td> <td>m -</td> <td>200</td> </tr> <tr> <td>cable jacket</td> <td>PTFE</td> <td>PVC</td> </tr> </tbody> </table>		temperature probe	extension cable	type	4 x 0.25 mm <sup>2</sup> black	LIYCY 8 x 0.14 mm <sup>2</sup> grey	standard length	m 3	5/10/25	max. length	m -	200	cable jacket	PTFE	PVC
	temperature probe	extension cable														
type	4 x 0.25 mm <sup>2</sup> black	LIYCY 8 x 0.14 mm <sup>2</sup> grey														
standard length	m 3	5/10/25														
max. length	m -	200														
cable jacket	PTFE	PVC														

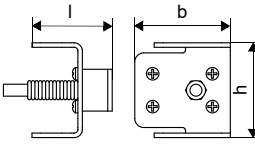
PT12F	
design	clamp-on short response time, with connector
type	Pt100
connection	4-wire
measuring range	°C -50...+250
accuracy T	$\pm(0.15 \text{ °C} + 2 \cdot 10^{-3} \cdot  T \text{ [°C] })$ class A
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ( $3 \text{ K} < \Delta T < 6 \text{ K}$ ), more corresponding to EN 1434-1
response time	s 8
housing	PEEK, stainless steel 304 (1.4301), copper
degree of protection	IP66
<b>dimensions</b>	
length l	mm 14
width b	mm 30
height h	mm 27
dimensional drawing	
weight	kg 0.32 (without connector)
<b>accessories</b>	
thermal conductivity paste 200 °C	x
thermal conductivity foil 250 °C	x
plastic protection plate, insulation foam	x

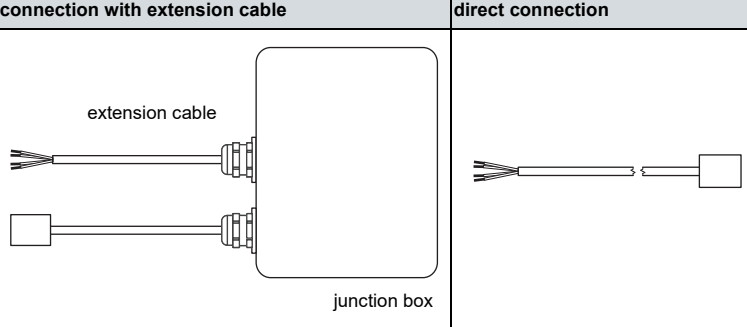
Connection system		
		
<b>Connection</b>		
temperature probe	extension cable	connector
		pin
red	grey	2
red/blue	red	6
white/blue	blue	1
white	white	7

Cable	
temperature probe	extension cable
type	4 x 0.25 mm <sup>2</sup> black
standard length	m 3
max. length	m -
cable jacket	PTFE

PT12F	
design	clamp-on short response time
type	Pt100
connection	4-wire
measuring range	°C -50...+250
accuracy T	$\pm(0.15 \text{ °C} + 2 \cdot 10^{-3} \cdot  T \text{ [°C] })$ class A
response time	s 8
housing	PEEK, stainless steel 304 (1.4301), copper
degree of protection	IP66
<b>dimensions</b>	
length l	mm 14
width b	mm 30
height h	mm 27
dimensional drawing	
weight	kg 0.32
<b>accessories</b>	
thermal conductivity paste 200 °C	x
thermal conductivity foil 250 °C	x
plastic protection plate, insulation foam	x

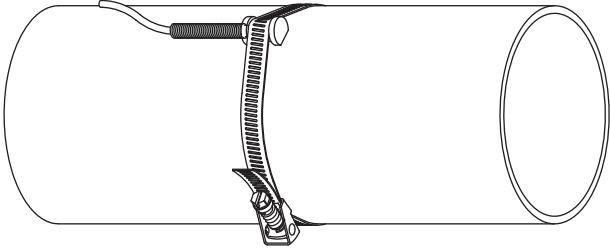
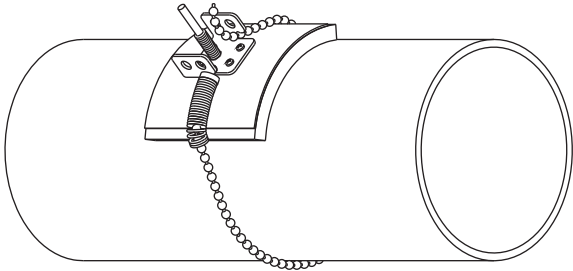
  

Connection system	
connection with extension cable	direct connection
	
<b>Connection</b>	
temperature probe	
red	
red/blue	
white/blue	
white	

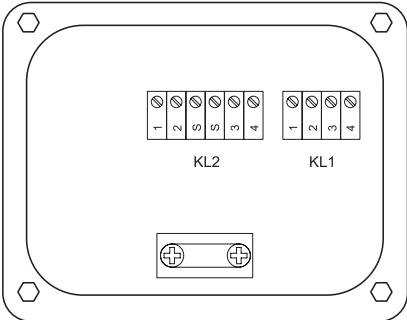
  

Cable	
temperature probe	extension cable
type	4 x 0.25 mm <sup>2</sup> black
standard length	m 3
max. length	m -
cable jacket	PTFE

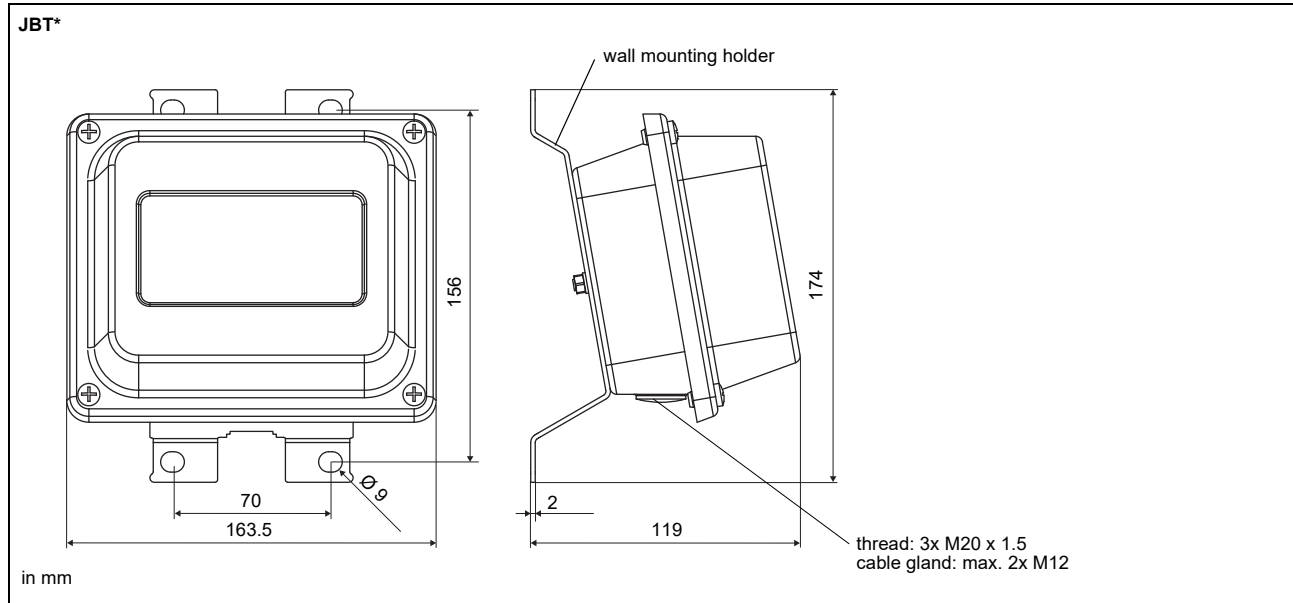
### Fixation

<p><b>tension strap PT12N</b></p> 	<p>material: stainless steel 301 (1.4310), 410 (1.4006) thermal insulation necessary</p>
<p><b>ball chain PT12F</b></p> 	<p>material: stainless steel 316L (1.4404) length: 1 m</p>

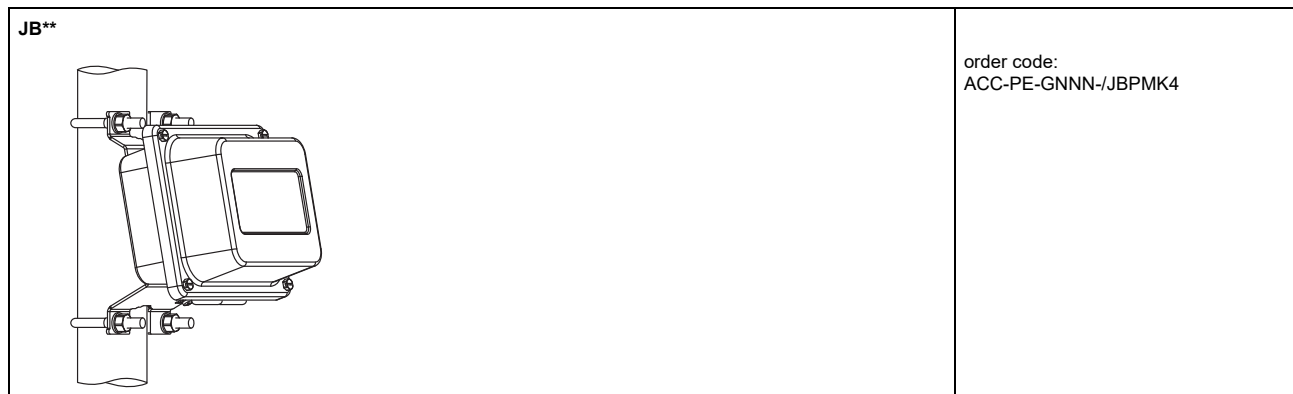
### Junction box

<b>JBT2, JBT3</b>		<b>Connection</b>												
<p>order code</p>	<ul style="list-style-type: none"> <li>• JBT2: ACC-PE-GNNN-/JB4</li> <li>• JBT3: ACC-PE-GNNN-/JB6</li> </ul>													
<p>weight</p>	<p>kg 1.2 kg</p>													
<p>fixation</p>	<p>wall mounting optional: 2" pipe mounting</p>													
<p><b>material</b></p>														
<p>housing</p>	<p>stainless steel 316L (1.4404)</p>													
<p>gasket</p>	<p>silicone</p>													
<p>degree of protection</p>	<p>IP67</p>													
<p><b>ambient temperature</b></p>														
<p>min.</p>	<p>°C -40</p>													
<p>max.</p>	<p>°C +80</p>													
<p><b>explosion protection</b></p>														
<p>• <b>ATEX</b></p>														
<p>junction box</p>	<p>JBT2</p>													
<p>marking</p>	<p><b>CE Ex</b> II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIC T 100 °C Dc Ta -40...+(70)80 °C</p>													
		<p><b>Temperature probe</b></p>												
		<table border="1"> <thead> <tr> <th>terminal strip</th> <th>terminal</th> <th>connection</th> </tr> </thead> <tbody> <tr> <td rowspan="4">KL1</td> <td>1</td> <td>red</td> </tr> <tr> <td>2</td> <td>red/blue</td> </tr> <tr> <td>3</td> <td>white</td> </tr> <tr> <td>4</td> <td>white/blue</td> </tr> </tbody> </table>	terminal strip	terminal	connection	KL1	1	red	2	red/blue	3	white	4	white/blue
terminal strip	terminal	connection												
KL1	1	red												
	2	red/blue												
	3	white												
	4	white/blue												
		<p><b>Extension cable</b></p>												
		<table border="1"> <thead> <tr> <th>terminal strip</th> <th>terminal</th> <th>connection</th> </tr> </thead> <tbody> <tr> <td rowspan="4">KL2</td> <td>1</td> <td>red</td> </tr> <tr> <td>2</td> <td>grey</td> </tr> <tr> <td>3</td> <td>white</td> </tr> <tr> <td>4</td> <td>blue</td> </tr> </tbody> </table>	terminal strip	terminal	connection	KL2	1	red	2	grey	3	white	4	blue
terminal strip	terminal	connection												
KL2	1	red												
	2	grey												
	3	white												
	4	blue												

### Dimensions



### 2" pipe mounting kit



FLEXIM GmbH  
Boxberger Str. 4  
12681 Berlin  
Germany  
Tel.: +49 (30) 93 66 76 60  
Fax: +49 (30) 93 66 76 80  
internet: [www.flexim.com](http://www.flexim.com)  
e-mail: [info@flexim.com](mailto:info@flexim.com)

Subject to change without prior notice.  
Errors excepted.

FLUXUS is a registered trademark of FLEXIM GmbH.

Copyright (©) FLEXIM GmbH 2020